

Product Description

ACRYLIC ROOFKOTE is made of 100% pure acrylic emulsion paint coating designed primarily for used as a roofing waterproof and general waterproof. It is UV resistance. ACRYLIC ROOFKOTE adheres practically on every surface. It is highly flexible and be able to fill hairline cracks. This product penetrates deep into pores of masonry and concrete.



Uses & Applications

- Use as both functional coating and decorative coating.
- Concrete deck roofing.
- Coat on concrete surface of building before topcoat.
- Balcony membrane system.
- Masonry facade waterproofing.
- Coat over minor cracks on concrete surface.

Key Benefits

- Monolithic membrane. Excellent waterproofing property.
- Water based. Easy to handle.
- Great elasticity, allow material to elongate and stay intact on the concrete surface of building in case cracks occurred due to vibration or temperature.
- Good adhesion with most types of surface.
- Good UV Resistance and weather endurance.
- Crack bridging.
- Excellent stain resistance.

Technical Data

| CHARACTERISTICS | RESULTS | TEST METHOD |
|------------------|---------------------------------|-----------------------|
| Solid Content | 60 ± 2 % | - |
| Density | 1.30 ± 0.05 | ASTM D1475 |
| Viscosity | 18,000 - 25,000 cps | Brookfield Viscometer |
| Hardness | 65 - 75 Shore A | ASTM D2240 |
| Elongation | 500 % | ASTM D412 |
| Tensile Strength | 2.5 N/mm ² | ASTM D412 |
| Bond Strength | 1.2 MPa | - |
| Water Absorption | 0.05 liter/m ² (24h) | - |
| Permeability | 0 | - |
| Drying Time | 1-2 hours | - |
| Full Cure Time | 7 days | - |

WATERPROOFING SYSTEM

Application Instructions

WATERPROOFING SYSTEM



SURFACE PREPARATION


- Newly poured concrete must be at least 7 days old.
- All surfaces must be clean, dry, free from surface contaminants and structurally sound. Surface preparation may be carried out by the use of pressure water cleaning, power buffing or scraping. Mold and fungus infested walls should have sodium hypochlorite applied to the substrate prior to pressure washing.
- Any structural cracks should be saw cut and struck smooth with a cementations or low shrink grouting compound.

PRIMING

- Add clean water 20-30% to mix for primer. Allow primer to dry.

PAINTING

- Thoroughly mix material well with low speed electric stirrer.
- Apply by brush, spray or roller. Apply ACRYLIC ROOFKOTE in multiple coats to coverage of no more than 2 m² per kg. Otherwise the film will spread too thin.
- Allow the product to dry between coats (usually 2 hrs.) Apply the later coat in the perpendicular direction with the previous coat.
- ACRYLIC ROOFKOTE can be used in conjunction with reinforce fiberglass mesh to improve resistance of wear and tear.
- To achieve smooth finish, 5-10% of clean water may be added to mix for topcoat.

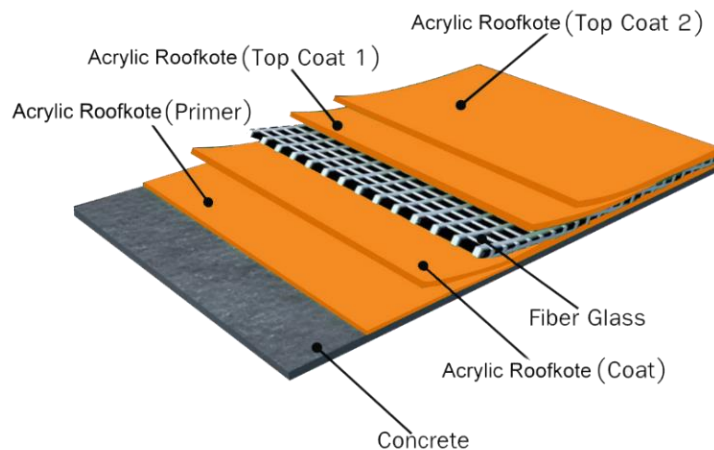

| Consumption Rate | Coat | Total DFT. | Coverage per pail |
|---------------------------------|------|-----------------|----------------------|
| 0.5-0.7 kg/m ² /coat | 2-4 | 700-1000 micron | 10-13 m ² |

* Coverage rate may vary due to porosity of surface including application method. Field trials are recommended.

CLEANING

- Tools and equipment should be cleaned whilst screed is still wet using clean water. Hands and skin should be cleaned immediately with clean water.

Precaution: Avoid working on rainy day. Before using ACRYLIC ROOFKOTE, please ensure you have received and read carefully both the hazard level applied on the container and the relevant material safety datasheet.

Safety Instructions

Wear appropriate protective equipment such as gloves, safety glasses or goggles, protective clothing during use. In case of eye contact: promptly wash eyes with plenty of water. Continue to rinse for at least 15 minutes and consult physician immediately.

Packing

20 kg. per pail.

Standard color available in white, grey and green.



* Colors may vary from actual product due to print quality.

Storage & Shelf Life

Material must be kept in-door at room temperature, avoid expose of direct sunlight. Product Shelf life is 12 months in unopened package and under suitable storage condition.

Disclaimer: The information provided in this document is based on our knowledge and experience of the product. In actual application results may vary because of site conditions, application methods and other factors that beyond our control. Users are recommended to test out product performance before actual use. Any data contained in this document, including our sale person or staff consultation is in no way constitutes a warranty relative to the use of our products. Our general terms and conditions of sales shall prevail. The superseded version of this datasheet may be issued without prior notice. Customers and users are encouraged to check with our staffs for the latest version of this document.

CLEVCON (THAILAND) CO., LTD.
14/12 Moo 5, Bung Kham Proi., Lam Luk Ka, Pathum Thani, Thailand 12150
Tel: +66-2-569-1540 • Fax: +66-2-569-1541
Email: clevconthailand@gmail.com • Website: www.clevconthai.com



ISO 9001:2015 Certified